

# TPS1100 Professional Series Technical data

## Define your requirements

### Overview of the models and options

	TC	TCR	TCRM <sup>+</sup>	TCA <sup>+</sup>	TCRA <sup>+</sup>	TCRA <sup>+</sup> Power Search
<b>Angle measurement</b>	•	•	•	•	•	•
<b>Distance measurement (IR)</b>	•	•	•	•	•	•
<b>Reflectorless and Long Range distance measurement (RL)</b>	•	•	•	~	•	•
<b>Motorized</b>			•	•	•	•
<b>Automatic Target Recognition (ATR)</b>			~	•	•	•
<b>PowerSearch (PS)</b>				~	~	•
<b>Electronic Guide Light (EGL)</b>	○	○	○	•	•	•
<b>Remote Control RCS1100</b>	○	○	○	○	○	○

• Standard    ○ Optional    ~ Later upgrade possible    - Option: standard range    + plus



### Angle measurement

Accuracy	Type 1101	Type 1102	Type 1103	Type 1105
Hz, V (ISO 17123-3):	1.5" (0.5 mgon)	2" (0.6 mgon)	3" (1 mgon)	5" (1.5 mgon)
Display resolution:	1" (0.1 mgon)	1" (0.1 mgon)	1" (0.5 mgon)	1" (0.5 mgon)
<b>Method</b>	absolute, continuous, diametrical			

### Distance measurement (IR)

Range (average atmospheric conditions)	
Round prism (GPR1):	3000 m
360° reflector (GRZ4):	1500 m
Mini prism:	1200 m
Reflective tape (60 mm x 60 mm):	250 m
Shortest measurable distance:	0.2 m to round prism (GPR1) / 1.5 m to a 360° reflector (GRZ4)

### Accuracy (ISO 17123-4) / time for a measurement

Standard mode:	2 mm + 2 ppm / 1.0 sec
Quick mode:	5 mm + 2 ppm / 0.5 sec
Tracking mode:	5 mm + 2 ppm / 0.3 sec
Quick mode tracking:	10 mm + 2 ppm / < 0.15 sec
Display resolution:	1 mm

**Method** Principle of phase measurement (coaxial, invisible infrared laser)

### Reflectorless and Long Range distance measurement (RL)

Range (average atmospheric conditions)	
Reflectorless (extended range):	170 m (Kodak Gray Card, white side)
Reflectorless (standard range):	80 m (Kodak Gray Card, white side)
Shortest measurable distance:	1.5 m
Long Range to round prism (GPR1):	1000 m – 5000 m

### Accuracy (ISO 17123-4) / time for a measurement

Reflectorless (standard mode):	3 mm + 2 ppm / typ. 3–6 sec, max. 12 sec
Reflectorless (tracking mode):	10 mm + 2 ppm / typ. 3–6 sec, max. 12 sec
Long Range:	5 mm + 2 ppm / typ. 2.5 sec, max. 8 sec

### Laser dot size

At 50 m:	approx. 10 mm x 20 mm
At 100 m:	approx. 15 mm x 30 mm
At 200 m:	approx. 30 mm x 60 mm

**Method** Principle of phase measurement (coaxial, visible red laser)

### Motorized (M)

#### Maximum speed

Rotating speed:	50 gon / sec
-----------------	--------------

### Automatic Target Recognition (ATR)

Range ATR mode / LOCK mode (average atmospheric conditions)	
Round prism (GPR1):	1000 m / 800 m
360° reflector (GRZ4):	600 m / 500 m
Mini prism:	500 m / 400 m
Reflective tape (60 mm x 60 mm):	65 m / --
Shortest measurable distance:	1.5 m to 360° reflector (GRZ4)

### Accuracy / time for a measurement

Distances < 300 m:	3 mm / 3 sec
Distances > 300 m:	1.5", 2", 3", 5" (equivalent type) / 3–4 sec

### Maximum speed (LOCK mode)

Tangential (standard mode):	25 m / sec at 100 m
Tangential (tracking mode):	18 m / sec at 100 m
Radial (tracking mode):	4 m / sec

**Method** Digital image processing (laser beam)



High-End Surveying  
 Precise, Quick, and Intelligent

**Leica**  
 Geosystems

## PowerSearch (PS)

<b>Range</b> (average atmospheric conditions)	
Round prism (GPR1):	200 m
360° reflector (GRZ4):	200 m (optimal when aligned with the instrument)
Mini prism:	100 m
Shortest measurable distance:	5 m
<b>Search time</b>	
Typical search time:	< 10 sec
<b>Maximum speed</b>	
Rotating speed:	50 gon / sec
<b>Method</b>	
	Digital signal processing (laser swath)

## Electronic Guide Light (EGL)


<b>Range</b> (average atmospheric condition)	
Working range:	5 m – 150 m
<b>Accuracy</b>	
Positioning accuracy:	5 cm at 100 m

## Remote Control RCS1100

<b>Method</b>	Transfer via integrated radio modem
<b>Control unit</b>	
Display:	8 lines with 32 characters 256*64 pixels, graphic LCD
Keyboard:	30 keys (6 function keys, 12 alphanumeric keys)
Interface:	RS232
<b>Battery</b>	
Type:	Nickel Metal Hydride (NiMH)
Voltage:	6 V
Capacity (GEB111):	1.8 Ah
<b>Weight</b>	
RCS1100:	0.77 kg
Battery (GEB111):	0.2 kg
Reflector pole adapter:	0.18 kg
<b>Working environment</b>	
Working temperature range:	-20°C to +50°C
Storage temperature range:	-40°C to +70°C
Dust/water (IEC 60529):	IP54
Humidity:	max. 95% non-condensing

## General data TPS1100

Compensator	Type 1101	Type 1102	Type 1103	Typ 1105
Setting range:	4' (0.07 gon)	4' (0.07 gon)	4' (0.07 gon)	4' (0.07 gon)
Setting accuracy:	0.5" (0.2 mgon)	0.5" (0.2 mgon)	1.0" (0.3 gon)	1.5" (0.5 mgon)
Method:	centralized dual axis compensator			
Level	Type 1101	Type 1102	Type 1103	Type 1105
Sensitivity of circular level:	6' / 2 mm	6' / 2 mm	6' / 2 mm	6' / 2 mm
Display resolution of level:	1" (0.1 mgon)	1" (0.1 mgon)	1" (0.5 mgon)	1" (0.5 mgon)
<b>Telescope</b>				
Magnification:	30x			
Free aperture of objective:	40 mm			
Field of view:	1°30' (1.66 gon) / 2.7 m at 100 m			
Focussing:	1.7 m to infinity			
<b>Control unit</b>				
Display:	8 lines with 32 characters 256*64 pixels, graphic LCD			
Keyboard:	30 keys (6 function keys, 12 alphanumeric keys)			
Angle display:	360°', 360° (decimal), 400 gon, 6400 mil, V%			
Distance display:	Meter, Int. Ft, Int. Ft/Inch, US Ft, US Ft/Inch			
Numbers:	1 / 2 (optional)			
<b>Data storage</b>				
Memory card:	PCMCIA ATA Flash (16 MB) / PCMCIA SRAM (512 KB, 2 MB)			
Number of data records:	18000 / 2 MB			
Interface:	RS232			
<b>Laser plummet</b>				
Accuracy:	deviates from the plumb line 1.5 mm (2 sigma) at 1.5 m			
Point diameter:	2.5 mm at 1.5 m			
<b>Endless drive</b>				
Number of drives Hz / V:	1 / 1			
Steps:	infinite			
<b>Battery</b>				
Type:	Nickel Metal Hydride (NiMH)			
Voltage:	6 V			
Capacity (GEB121):	3.6 Ah			
Number of measurements:	400 – 600			
<b>Weight</b>				
Instrument:	4.7 – 4.9 kg (10.4 – 10.8 lbs)			
Battery (GEB121):	0.4 kg (0.8 lbs)			
Tripod (GDF121):	0.8 kg (1.7 lbs)			
<b>Working environment</b>				
Working temperature range:	-20°C to +50°C			
Storage temperature range:	-40°C to +70°C			
Dust/water (IEC 60529):	IP54			
Humidity:	max. 95% non-condensing			

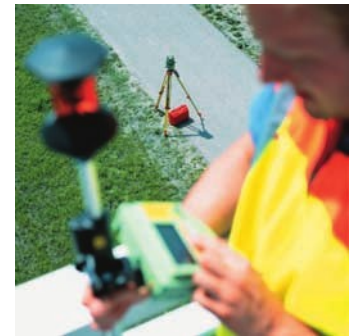

**Distance meter (IR), ATR and PowerSearch:**  
Laser class 1acc.  
IEC 60825-1 resp. EN 60825-1  
Laser class I acc.  
FDA 21CFR Ch. I §1040

**Distance meter (RL, standard range) and laser plummet:**  
Laser class 2 acc.  
IEC 60825-1 resp. EN 60825-1  
Laser class II acc.  
FDA 21CFR Ch. I §1040



**Distance meter (RL, extended range):**  
Laser class 3R acc.  
IEC 60825-1 resp. EN 60825-1  
Laser class IIIa acc.  
FDA 21CFR Ch. I §1040



**EGL:**  
LED class 1 acc.  
IEC 60625-1 resp. EN 60825-1

**Leica**  
Geosystems

Leica Geosystems AG  
CH-9435 Heerbrugg  
(Switzerland)  
Phone +41 71 727 31 31  
Fax +41 71 727 46 73  
www.leica-geosystems.com