



Provided by Xpert Survey Equipment  
 Click Trimble TS215 for Product Info and Updated Pricing

### Key feATures

- Makes two-person building construction layout more efficient and cost effective
- Built tough to deliver the accuracy you need every time
- Proven Nikon optics and technology provide accuracy and confidence measurement
- Easy-to-use onboard software makes performing building construction tasks simpler and faster
- Efficient, convenient power consumption ensures productivity day long



**The Trimble TS215 Total Station is a rugged, entry-level mechanical total station designed to meet the needs of building construction contractors performing two-person construction layout. Use the Trimble TS215 alone, or partner it with the Trimble LM80 Layout Manager for enhanced layout capabilities, blueprint entry, and the added convenience of a graphic display.**

#### Trimble AccurAcY for consTruCtion lAYouT ... ThAT you cAn Achieve yourself

The Trimble TS215 Total Station lets you perform a wide range of building construction layout tasks without relying on third parties.

You can independently achieve industry-leading Trimble distance and measurement accuracy—and enjoy complete control over your layout needs.

Saving you money and increasing your efficiency, the TS215 provides best accuracy for jobs such as:

- Measuring angles and distances
- all Setting out angles and distances
- Laying out building lines
- Setting point locations for placement
- Setting anchor bolts
- Establishing excavation

#### A ToTAl sTATION ThAT Delivers WhATever your Job conDiTions

When you arrive on the job site, just pull the Trimble TS215 Total Station out of its case and get to work. This rugged and reliable instrument accurately delivers whatever the conditions.

#### Durable high-Performance hardware

The TS215 offers features designed to deliver quality results and increase your productivity:

- Superior Nikon optics provide clear and precise aiming even in low light. Short- and long-distance focusing is faster.
- Rugged aluminum housing ensures durability and water resistance.
- An internal optical plummet and ensures high accuracy stationing.

- Just four rechargeable AA batteries are required for approx 6–15 hours of operation. When the instrument is low on power, replacing the batteries is quick and convenient, resulting in less downtime.

#### Trusted, easy-to-learn Programs

The TS215 operates with Trimble onboard software that has been proven in the field. It is easy to use and learn, so new TS215 users can be up and running with the instrument in no time. Onboard layout programs include:

- Point-to-point or missing-line measurement
  - Layout-to-point via down-and-out entry
  - Reference-line measurement
- Distances are clearly displayed in feet and inches, decimal feet, and meters; and multiple display pages enable users to easily access the data in the field.

The software is accessed via a simple onboard interface, or through the enhanced graphic display of the LM80 Layout Manager.

#### A consTruCtion lAYouT soluTion from The PosiTioning leADer

Trimble is the industry leader in high-accuracy and precision positioning, delivering the latest in technology for construction layout solutions. So with the Trimble TS215 Total Station you can be assured of the quality of your work. You can confidently stake your reputation on your results. In addition, Trimble 24/7 worldwide support means you are never alone; the surveying and construction professionals at Trimble are ready to lend a hand whenever you need it. expedites setup

## Performance Specifications

### Angle Measurement

Accuracy (Standard deviation based on DIN18723) . . . 5" (1.5 mgon)  
 Angle reading increments . . . 1"/5"/10" (0.2 mgon)  
 Automatic level compensator . . . Single-axis compensator

### Distance Measurement

#### Prism Mode

Standard measurement . . . . . ±3 mm + 2 ppm  
 Tracking . . . . . ±10 mm + 2 ppm

#### Measuring Time

#### Prism Mode

Standard measurement . . . . . 1.6 s  
 Tracking . . . . . 1.0s

### Range (at Standard Clear)

#### Measurement to Prism

1 prism (50 mm dia.) . . . . . 3,000 m  
 3 prisms . . . . . 3,000 m

#### Range with Nikon specified prisms

Good conditions (No haze, visibility over 40 km [25 miles])  
 With reflector sheet (5 5 x m 5 to cm) . . . 100 m (16.4 ft to 328 ft)  
 With mini prism 2.5 cm (1 in) . . . . . 1,200 m (3,930 ft)  
 With single prism 6.25 cm (2.5 in) . . . . . 2,300 m (7,540 ft)  
 With triple prism . . . . . 3,000 m (9,840 ft)

## General Specifications

Optical plummet . . . . . Optical 3x  
**Telescope**  
 Magnification . . . . . 33x


Aperture . . . . . 45 mm (1.77")  
 Illuminated crosshair . . . . . No  
 Display screen . . . . . Single side - graphic LCD  
 Operating temperature . . . . . +20 °C ppm to +50 °C ppm  
**Battery**  
 Type . . . . . 4x AA Ni-MH Batteries, rechargeable  
 Charge time . . . . . Approximately 3.7 hours  
 Operating time . . . . . Approximately 12-15 hours  
 Class II laser product label . . . . . No

## DATA Transfer And recording

Data input/output . . . . . RS232  
 LM80 interface . . . . . Optional

© 2010, Trimble Navigation Limited. All rights reserved. Trimble and the Globe & Triangle logo are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. All other trademarks are the property of their respective owners. PN 022482-1971 (01/10)

Specifications subject to change without notice.

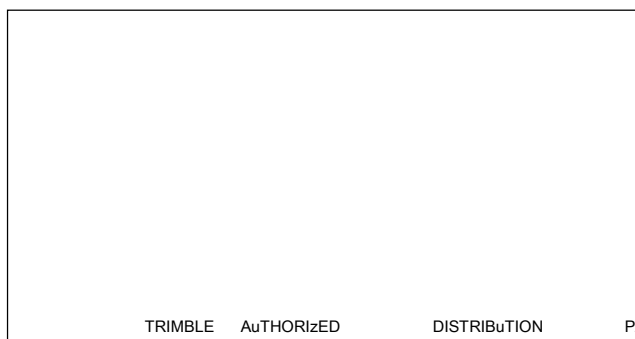

TRIMBLE AUTHORIZED DISTRIBUTION PARTNER

**NORTH AMERICA**  
 Trimble Construction Division  
 5475 Kellenburger Road  
 Dayton, Ohio 45424  
 USA  
 800-538-7800 (Toll Free)  
 +1-937-245-5154 Phone  
 +1-937-233-9441 Fax

**EUROPE**  
 Trimble Germany GmbH  
 Am Prime Parc 11  
 65479 Raunheim  
 GERMANY  
 +49-6142-2100-0 Phone  
 +49-6142-2100-550 Fax

**ASIA-PACIFIC**  
 Trimble Navigation  
 Singapore PTE Ltd.  
 80 Marine Parade Road, #22-06  
 Parkway Parade  
 Singapore, 449269  
 SINGAPORE  
 +65 6348 2212 Phone  
 +65 6348 2232 Fax



www.trimble.com