

Provided by Xpert Survey Equipment
Click Sokkia DX-105AC for Product Info and Updated Pricing

SOKKIA

DX Series

Direct Aiming X-ellence Station



- Superior Auto Pointing Technology
- Advanced Angle Measurement System
- RED-tech Technology Reflectorless EDM
- LongRange Data Communication
- MAGNET™ Field On-Board Software

Get the Job Done Quickly and Easily in any Environment.

New Auto Pointing "Direct Aiming Technology"

The DX Series employs "Direct Aiming Technology" featuring a new intelligent algorithm that automatically aims to the prisms with precisely corrected angle readings.

The technology works even in dim or dark conditions where the prism is difficult to be found. Whatever the job requires and wherever operators must go, the DX Series gets your job done faster and easier while still maintaining high accuracy.



Automatic Aiming Function is Productivity

The DX Series provides consistent auto pointing accuracy speed regardless of operators skill level.


- More than what human eyes can do
- Easy "Stake-out" operation
- Higher productivity in your job field
- Mesh Scan operation
- Easy "Topo" operation



RED-tech Technology Reflectorless EDM

- Reflectorless operation from 30cm to 1,000m*.
- Sokkia's traditional pinpoint precision in reflectorless distance measurement.
- Fast distance measurement of 0.9 seconds.
- Coaxial EDM beam and laser-pointer provide fast and accurate aiming.
- Ensures accuracy even with reflective sheets.

* With Kodak Gray Card white side (90% reflective).
Brightness level at object surface: <=500 lx.



LongRange Data Communication

The DX Series of total stations feature Bluetooth® Class1 technology for reliable data communications.



Advanced Angle Measurement System

Sokkia's original absolute encoders provide long-term reliability in any job site condition. DX-101 features groundbreaking IACS (Independent Angle Calibration System).



Waterproof and Rugged

- IP65 dustproof / waterproof rating.
- Standard usage temperature range -20 to +50°C.



User-Friendly Operation

"STAR-KEY" instantly brings up functions. Trigger key lets you take a series of measurements without taking your eye from the telescope. Control panel consists of 26-key board with color LCD touch screen display.

TSshield



An industry first!

New function to protect your investment

TSshield is a standard feature on all new models of Sokkia total stations. Its advanced communication system provides new opportunities to secure and maintain your investment.

*For more detail of TSshield, please refer to the TSshield's leaflet. This service may not be available in some areas.

**Fast and Powerful EDM
1,000m Non-Prism Range**

**Easy Access USB Type
A/B Flash Drive Port**

**Rugged Waterproof/
Dustproof IP65 Design**

**Industry's First
TSshield System**

**Advanced Angle
Measurement System**

**Exclusive "STAR-KEY"
Functionality**

**Backlit 26 Key Keyboard
with Directional Arrow Key**



Easy "Topo" and "Stake-out" Operation

Just "Rough Aim" and "Press Trigger button" to get precise aiming and measurement to the prism target. Stake-out can be easily done by automatic turning and guide light.



Software

MAGNET™ software is tailored for use with Sokkia total stations in both field and office works.


MAGNET™ Enterprise

A managers dream of tracking all field and office data in one simple to access web interface. Store and exchange your field data in the Enterprise cloud. Save the drive time by sending your field and office updates to the cloud rather than driving back to the office.



MAGNET™ Office

Full CAD functionality with MAGNET™ Office Site and Topo. Or field data processing with MAGNET™ Office Tools inside AutoCAD® products, like Civil3D®. The MAGNET™ Office solution has what you need. Pick the module that fits your needs.

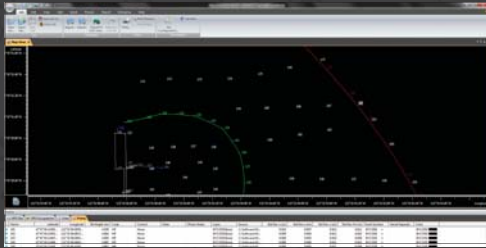

MAGNET™ Field

Powerful on-board software that covers full functions for surveying and engineering tasks. MAGNET™ Field handles data collection, stake out, roads and coordinate geometry.



SOKKIA

SOKKIA CORPORATION

16900 W. 118th Terrace Olathe, KS 66061
Phone (800) 4-SOKKIA Fax: (913) 492-0188
www.sokkia.com

Specifications subject to change without notice
©2013 Topcon Corporation All rights reserved.
SOK-1023 Rev A 8/13

DX Series

DIRECT AIMING X-CELLENCE STATION

SPECIFICATIONS

Model	DX-101AC	DX-103AC	DX-105AC
Telescope			
Magnification / Resolving power	30x / 2.5"		
Length: 168mm (6.6in.), Objective aperture: 45mm (1.8in.) (50mm (2.0in.) for EDM), Image: Erect, Field of view: 1°30' (26m/1,000m), Minimum focus: 1.3m (4.3ft.), Reticle illumination: 5 brightness levels			
Angle measurement			
Display resolutions (selectable)	0.5" / 1" (0.0001 / 0.0002gon, 0.002 / 0.005mil)	1" / 5" (0.0002 / 0.001gon, 0.005 / 0.02mil)	
Accuracy (ISO 17123-3:2001)	1"	3"	5"
IACS (Independent Angle Calibration System)	Provided		
Dual-axis compensator / Collimation compensation	Dual-axis liquid tilt sensor, working range: ±6' / Collimation compensation available		
Distance measurement			
Laser output	Reflectorless mode: Class 3R / Prism/sheet mode: Class 1		
Measuring range (under average conditions)	Reflectorless	0.3 to 800m (2,620ft.) / Under good conditions: to 1,000m (3,280ft.)	
	Reflector sheet	RS90N-K: 1.3 to 500m (4.3 to 1,640ft.), RS50N-K: 1.3 to 300m (4.3 to 980ft.), RS10N-K: 1.3 to 100m (4.3 to 320ft.)	
	Mini prisms	CP01: 1.3 to 2,500m (8,200ft.), OR1PA: 1.3 to 500m (1,640ft.)	
	One AP prism	1.3 to 5,000m (4.3 to 16,400ft.) / Under good conditions: 6,000m (16,680ft.)	
	Three AP prism	to 8,000m (26,240ft.) / Under good conditions: to 10,000m (32,800ft.)	
Display resolution	Fine: 0.0001 / 0.001m (0.001 / 0.01ft., 1/16 / 1/8in.) Rapid: 0.001m / 0.01ft. / 1/8in. Tracking: 0.01m / 0.1ft. / 1/2in.		
Accuracy (ISO 17123-4:2001) (D=measuring distance in mm.)	Reflectorless	(2 + 2ppm x D) mm	
	Reflector sheet	(2 + 2ppm x D) mm	
	AP/CP prism	(1.5 + 2ppm x D) mm	
Measuring time	Fine: 0.9s (initial 1.5s), Rapid: 0.6s (initial 1.3s), Tracking: 0.3s (initial 1.3s)		
Motor drive system			
Type	DC Servo motor		
Max Rotation speed	70°/sec		
Auto Pointing			
Working range	One AP prism	1.3 to 1,000m	
	Reflector sheet	5 to 50m	
	360° prism	2 to 600m	
	Mini prisms	CP01: 1.3 to 700m, OR1PA 1.3 to 500m	
OS, Interface and Data management			
Operating system / Application	Microsoft Windows CE 6.0 / MAGNET™ Field		

Kit Components

- DX Series Total Station
- Battery x2 (BDC70)
- Battery charger (CDC68)
- Power cable
- Lens cap
- Lens hood
- Tool pouch
- Screwdriver
- Lens brush
- Adjusting pin x2
- Cleaning cloth

- Operation manual
- USB memory
- Laser caution sign-board
- Carrying case
- Carrying strap x2



- Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sokkia is under license.
- Other trademarks and trade names are those of their respective owners.
- Designs and specifications are subject to change without notice.
- Product colors in this brochure may vary slightly from those of the actual products owing to limitations of the printing process.

Your local Authorized Dealer is: